



7-Port USB 2.0 & FireWire 400 Combo PCI Host Card

User Manual

Model: UGT-UF100

All brand names and trademarks are properties of their respective owners.

www.vantecusa.com

Features and Benefits

- Combo design adds four USB 2.0 (480Mbps) and three FireWire (400Mbps) ports into your system
- Hot-swapping feature allows you to connect/disconnect devices without first turning system off

USB 2.0 interface:

- Compliant with USB specification rev. 2.0
- Supports high-speed (480Mbps), full-speed (12Mbps), and low-speed(1.5Mbps) data transfer modes for simultaneous operation of multiple USB 2.0/1.1 devices
- Works with a various type of USB devices including hubs, removable drives, digital cameras, scanner, CD-RWs, DVD-ROMs, PC video cameras, printers, and more...

FireWire 400 (1394a) interface:

- IEEE 1394-1995, 1394a-2000 and OHCI 1.1 standards
- Supports serial bus data transfer rates of 100, 200 and 400Mbps
- Works with various types of 1394 devices including DV camcorder/cameras, hard disk drives, CD-RWs, DVD-ROMs, removable drives, scanners, and other audio/video devices


Package Contents

- 1 x 7-Port USB 2.0 FireWire 400 Combo PCI Host Card
- 1x 1394a DV cable (6-pin to 4-pin)
- 1 x User's Manual

System Requirements

- Windows® 2000/XP/Server 2003/Vista
- Available PCI slot

Hardware Description

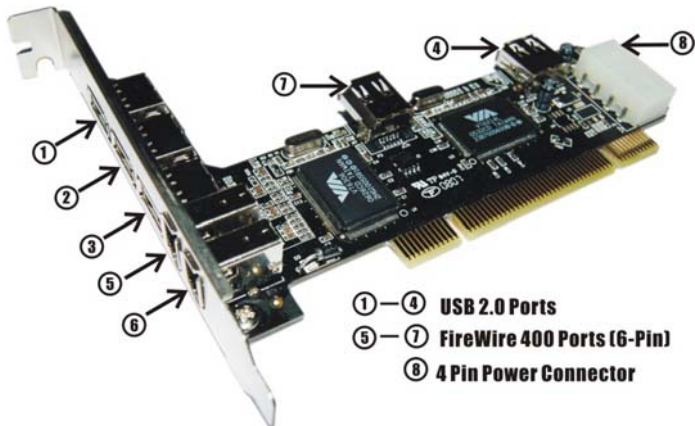

Hardware Installation

1. Turn Off the power to your computer.
2. Unplug the power cord and remove your computer's cover.
3. Remove the slot bracket from an available PCI slot
4. To install the card, carefully align the card's bus connector with the selected PCI slot on the motherboard. Push the board down firmly.
5. Connect the system power source to the board's power connector.
6. Replace the slot bracket's holding screw to secure the card.

7. Replace the computer cover and reconnect the power cord.

Driver Installation

For Windows® XP/2000

Windows® 2000/XP will automatically detect and install the correct driver for the PCI USB 2.0 & IEEE 1394a Combo.

However, please ensure you have the latest Service Pack Installed.

For Windows® XP

- **Windows® XP Service Pack 1 or later**

For Windows® 2000


- **Windows® 2000 Service Pack 4 or later**

For Windows® Server 2003/Vista

Windows® Server 2003 has built-in driver support for this controller. Just install the board and Windows will automatically detect and install the correct drivers for it. No additional driver is necessary.

To Verify Windows Installation

1. Right click **My Computer**, then click **Manage**. Click **Device Manager**.
2. Double click **IEEE 1394 Bus host controllers** option and a **VIA OHCI Compliant IEEE 1394 Host Controller** should be displayed



3. Double click **Universal Serial Bus controllers** option.
 - **USB Root Hub** (**USB 2.0 Root Hub** in Windows® 2000)
 - **USB Root Hub**
 - **USB Root Hub**
 - **VIA Rev 5 or later USB Universal Host Controller**
(**VIA USB Universal Host Controller** in Windows® 2000)
 - **VIA Rev 5 or later USB Universal Host Controller**
(**VIA USB Universal Host Controller** in Windows® 2000)
 - **VIA USB Enhanced Host Controller**

